

02/28/00  
jc712 U.S. PTO  
09/514250

UTILITY PATENT APPLICATION TRANSMITTAL UNDER 37 C.F.R. §1.53(b)

ASSISTANT COMMISSIONER FOR PATENTS

Box PATENT APPLICATION

Washington, D.C. 20231

Case Docket No.: YHK-039

Sir:

Transmitted herewith for filing is the patent application of

INVENTOR OR APPLICATION IDENTIFIER: Ho Young CHOI, Hee Jong MOON, Man Hyo PARK

FOR: PROJECTION LENS SYSTEM

Enclosed are:

1. ☒ 36 pages of specification, claims, abstract
2. ☒ 11 sheets of FORMAL drawing.
3. ☒ 2 pages of newly executed Declaration & Power of Attorney (copy).
4. ☒ Priority Claimed. Korean Patent Application Nos. P99-31570 filed July 31, 1999 and P99-51042 filed November 17, 1999
5. ☐ Small Entity Statement.
6. ☐ Information Disclosure Statement, Form PTO-1449 and reference.
10. ☒ Authorization under 37 C.F.R. §1.136(a)(3).
11. ☐ Other:
7. ☒ Assignment Papers for LG Electronics Co. (cover sheet, assignment & assignment fee).
8. ☐ Certified copy of \_\_\_\_\_
9. ☒ Two (2) return postcards.  
☒ Stamp & Return with Courier.  
☒ Prepaid Postcard-Stamped Filing Date & Returned with Unofficial Serial Number

jc554 U.S. PTO  
09/514250  
02/28/00

CLAIMS AS FILED					
For	No. Filed		No. Extra	Rate	Fee
Total Claims	37	- 20	17	X \$18.00	\$306.00
Indep. Claims	5	- 3	2	X \$78.00	\$156.00
Multiple Dependent Claims (If applicable)				X \$260.00	\$0.00
				BASIC FEE	\$690.00
				TOTAL FILING FEE	\$1,152.00

☐ This is a Continuation-in-part (CIP) of prior application No: \_\_\_\_\_ filed \_\_\_\_\_. Incorporation By Reference-The entire disclosure of the prior application is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

☐ Amend the specification by inserting before the first line the sentence:

--This application is a continuation-in-part of Application Serial No. \_\_\_\_\_ filed \_\_\_\_\_.--

☒ A check in the amount of \$1,152.00 (Check #8391) is attached.

☐ Please charge my Deposit Account No. 16-0607 in the amount of \$\_. A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy is enclosed.

☒ Any additional filing fees required under 37 C.F.R. 1.16.

☒ The Commissioner is hereby authorized to charge payment of following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy of this sheet is enclosed.

☒ Any patent application processing fees under 37 C.F.R. 1.17.

☒ Any filing fees under 37 C.F.R. 1.16 for presentation of extra claims.

FLESHNER & KIM, LLP

Daniel Y.J. Kim  
Registration No. 36,186

Correspondence Address Below:

P.O. Box 221200

Chantilly, VA 20153-1200

(703) 502-9440 DYK/ham

Date: February 28, 2000

## PROJECTION LENS SYSTEM

### BACKGROUND OF THE INVENTION

5

#### Field of the Invention

This invention relates to a projection lens system for a projection device, and more particularly to a compact  
10 projection lens system that is capable of correcting a color aberration.

#### Description of the Related Art

15 Recently, there has been rapidly spread a projection-type device for magnificently projecting a small-size image using a projection lens as a request for a large-scale screen and a high quality image in a display device increases. The projection-type device is largely  
20 classified into a front projection system and a rear projection system depending on a direction in which a picture is projected onto a screen. The rear projection system has been more highlighted on an advantage in that it can display a relatively bright picture even at a place  
25 where a peripheral environment thereof is bright. A typical rear projection device includes a projection television (TV). The projection TV does mainly use a cathode ray tube (CRT) and a liquid crystal display, etc. as a light source for implementing a small picture. A  
30 small picture re-expressed on the CRT or the liquid crystal panel is enlarged by the projection lens and

thereafter is projected onto the rear surface of the screen in such a manner to be displayed as a large picture.

Referring to Fig. 1A and Fig. 1B, there are shown a front  
5 internal structure and a side internal structure of a projection TV using a light source as the conventional CRT, respectively. The projection TV includes a CRT 2 for displaying a picture corresponding to image signals, a projection optical system 4 for magnificently projecting  
10 the picture displayed on the CRT 2, a reflecting mirror 6 for reflecting the picture projected from the projection lens system 4 into a screen 8, and a screen 8 for displaying the picture projected magnificently by the projection lens system 4. As shown in Fig. 1A, the CRT 2  
15 consists of red, green and blue CRTs 2R, 2G and 2B to display each of red, green and blue color pixel. The projection lens system 4 consists of red, green and blue projection lens systems 4R, 4G and 4B arranged at an outlet of each red, green and blue CRT 2R, 2G and 2B to  
20 magnificently project a picture from each red, green and blue CRT 2R, 2G and 2B. The reflecting mirror 6 allows the screen 8 to display a large color picture by reflecting a picture projected magnificently by means of the red, green and blue projection lens systems 4R, 4G and 4B to be  
25 imaged on the screen 8. In this case, the projection lens system 4 requires to assure a performance capable of resolving scanning lines on the CRT through corrections of a spherical aberration, an astigmatism, a distortion and a color aberration in order to realize a high definition. To  
30 this end, each of the red, green and blue projection lens systems 4R, 4G and 4B consists of a plurality of plastic

lenses and a glass lens.

The basic configuration of the projection lens system is described in detail in U.S. Patent Nos. 4,300,817, 4,384,081, 4,526,442 and 4,697,892. Also, U.S. Patent No. 4,685,774 discloses a projection lens system for increasing a variation of refractive power in an aspheric surface in the optical axis and the margin to correct an aberration generated along with the increasing of field view angle. Further, U.S. Patent No. 4,776,581 teaches a projection lens system capable of increasing the field view angle and being compact. However, the projection lens system disclosed in U.S. Patent Nos. 4,300,817, 4,384,081, 4,526,442, 4,697,892, 4,685,774 and 4,776,581 can not obtain a good performance in the brightness and so on, due to F/# of about 1.0. In other words, the projection lens system must have the F/# of below 1.0. However, the projection lens system disclosed in the above U.S. Patents can not obtain the F/# of below 1.0 by the proposed lens configuration and the dispersion of refractive power.

Also, U.S. Patent No. 4,963,007 discloses an axial chromatic correction as an aberration correction art. conventionally, the axial chromatic correction is defined as the following equation:

$$K/\nu = K_1 / (\nu_1 + K_2) / \nu_2 \quad \text{-----} \quad (1)$$

Wherein,  $K_1$  and  $K_2$  are refractive powers of lens elements L1 and L2, and  $\nu_1$  and  $\nu_2$  are values of dispersion

(1/Abbe's number) for the lens elements L1 and L2.  $\nu_1$  and  $\nu_2$  can correct the axial chromatic aberration because having an infinite value when the value of  $K/\nu$  in the equation (1) is "0". The projection lens system proposed in the U.S. Patent No. 4,963,007 distributes appropriately the refractive power and combines lenses having the dispersion value different from each other so as to correct the axial chromatic aberration. Also, a projection lens system disclosed in U.S. Patent No. 5,272,540 teaches a configuration of cemented doublet for correcting the axial chromatic aberration. These projection lens systems disclosed in the above U.S. Patents are adapted to correct the axial chromatic aberration because lenses is split according to the dispersion of refractive power or the cemented doublet is used for the projection lens system. However, these projection lens systems allow to cost up due to the increasing of unnecessary lenses. The projection lens system described in the above U.S. Patent No. 4,963,007 combines glass lenses of Flint series and Crown series or plastic lenses of polystyrene and acrylic series so as to correct the axial chromatic aberration. Also, the projection lens system disclosed in the above U.S. Patent No. 5,272,540 employs a cemented doublet, which lenses of different Abbe's number is banded, so as to correct the optical axial chromatic aberration. The configuration of the projection lens system disclosed in the above U.S. Patent No. 5,272,540 is shown in Fig. 2.

The projection lens system of Fig. 2 includes first and second lenses 10 and 12 having a weak refractive power, a

third lens 14 responsible for a major positive refractive power of the projection lens system, a fourth lens 16 having a weak positive refractive power, and a fifth lens 18 having a strong refractive power. The first lens 10 plays a role to correct a spherical aberration while the second lens 12 plays a role to correct a comma aberration and astigmatism. These first and second lenses 10 and 12 are made from a plastic material. The fourth and fifth lenses 16 and 18 are made from a plastic material, which plays a role to correct astigmatism. The third lens 14 consists of a doublet made from a glass to correct a color aberration. In other words, the third lens 14 corrects a color aberration using a combination of lenses having a positive refractive power with lenses having a negative refractive power.

As described above, the projection lens system disclosed in U.S. patent no. 5,272,540 consists of a doublet and a plurality of lenses so as to correct a color aberration and various optical aberrations. Because the projection system of U.S. patent no. 5,272,540 has a number of lenses, it has a difficult in making a small dimension construction and causes a rise in a manufacturing cost. This requires a projection lens system capable of realizing a high resolution and a high brightness with reducing the number of lenses.

#### SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to

provide a projection lens system capable of realizing a high definition and a high brightness by correcting a chromatic aberration and designing in low F number (F/#).

5 In order to achieve these and other objects of the invention, a projection lens system according to an aspect of the present invention includes a plurality of refractive lenses and at least one diffractive optical element formed on at least one among the surfaces of the  
10 refractive lenses.

A projection lens system according to another aspect of the present invention includes a plurality of refractive lenses and at least one diffractive optical element formed  
15 on at least one among the faces of the refractive lenses to correct aberrations at an axis and the outside of the axis.

A projection lens system according to still another aspect  
20 of the present invention includes a first lens for correcting an aberration generated by a variation of height from a light axis, the first lens having at least one surface formed with diffractive optical element thereon; a second lens for refracting lights passed  
25 through the first lens; and a third lens for correcting a field curvature and an astigmatism of the lights passed through the second lens.

A projection lens system according to still another aspect  
30 of the present invention includes: a first lens having a positive refractive power at the center thereof and a

negative refractive power at the peripheral thereof; a second lens having a relatively large positive refractive power; a third lens having a positive refractive power; a fourth lens having a negative refractive power; and at least one diffractive optical element formed on at least one among the surfaces of the lenses.

A projection lens system according to still another aspect of the present invention includes: a first lens having a weak refractive power; a second lens having a weak refractive power; a third lens having a strong positive refractive power; a fourth lens for correcting an aberration being in lights from the third lens; and a fifth lens having a negative refractive power; and at least one diffractive optical element formed on at least one among the surfaces of the lenses.

#### BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects of the invention will be apparent from the following detailed description of the embodiments of the present invention with reference to the accompanying drawings, in which:

Fig. 1A and Fig. 1B are a front view and a side view of a conventional rear projection device, respectively;

Fig. 2 is a detailed view of the conventional projection lens system;

Fig. 3 is a detailed view of a projection lens system according to an embodiment of the present invention;

Fig. 4 is a view of a light path explaining a diffractive



characteristic of light by a lens designed with a diffractive optical element adapted to the present invention;

Fig. 5 is a view showing a converging state of lights by first diffractive lights when a diffractive optical element is adapted to a flat surface;

Fig. 6 is a detailed view of a projection lens system according to another embodiment of the present invention;

Fig. 7A and Fig. 7B illustrate a dispersion characteristic of a refracting lens and a diffractive optical element to a light beam, respectively;

Fig. 8 is a graph showing a relationship of a phase amount to the diffractive surface of the diffractive optical element.

Fig. 9A and 9B are graphs showing a chromatic aberration correction characteristic of the projection lens system according to an embodiment of the present invention; and

Fig. 10 is a detailed view of a projection lens system according to still another embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig. 3 shows a projection lens system according to an embodiment of the present invention. The projection lens system of Fig. 3 includes three lenses 30, 32 and 34. A side surface of the first lens 30 is designed a surface having a diffractive optical function, thereby enhancing a performance of lens system and allowing a mechanism to be small in size. To this end, the projection lens system of Fig. 3 includes the first lens 30 having a diffractive

optical surface; the second lens 32 for refracting lights  
passed through the first lens 30; and the third lens 34  
for correcting a field curvature and an astigmatism of the  
lights passed through the second lens. The front surface  
5 S1 of the first lens 30 is formed in aspheric surface and  
the rear surface S2 of the first lens 30 is formed to have  
a diffractive optical element 30A thereon. The first lens  
30 corrects a spherical aberration of optical system. In  
this case, the diffractive optical surface S2 is very  
10 effective relative to the other lenses having a  
substantially equal dispersion characteristic because of  
having a negative dispersion characteristic, in the  
correction of axial chromatic aberration. Also, the  
diffractive optical surface S2 is fabricated by a plastic  
15 molding process such that a mass-productivity enhances and  
a manufacturing cost decreases. The second lens 32 has  
very strong refractive power because of being a spherical  
glass lens. Since the second lens 32 is insensible to the  
temperature variation, the second lens 32 can assure a  
20 stable performance against the variation of external  
temperature. The third lens 34 is formed in a concave  
shape and installed to a coolant 36 on the front surface  
of cathode ray tube panel 38. The third lens 34 corrects  
a field curvature and distortion aberrations.

25

The diffractive optical surface S2 employed to the  
projection lens system is formed in a fine structure of  
micron size, as shown in Fig. 4. The diffractive optical  
surface S2 shown in Fig. 4 makes to diffract instead of to  
30 refract lights refracted at which the lights have passed  
through the front surface S1 of the first lens 30. In this

case, the diffractive lights is separated into 0th order diffractive lights ( $m=0$ ), first order diffractive lights ( $m=\pm 1$ ), second order diffractive lights ( $m=\pm 2$ ), and higher order diffractive lights above third order by the characteristic of the diffractive optical element 30A. If the pitch, the structure and the depth of the diffractive optical element 30A are adjusted, the diffractive lights of desirable order can be obtained. Such a characteristic of diffractive optical element 30A is employed, the refractive lens can obtain a substantially high refractive index by only a shape of lattice regardless to a refractive index of material, a curvature of lens and a thickness determining the refractive power. Also, if it is appropriately adjusted a phase term of the diffractive optical element 30A, which has many coefficients, as an aspherical surface, the aberration is effectively corrected.

Also, a desired refractive power can be obtained when the diffractive optical element 30A is formed on one surface of the flat panel 35 as shown in Fig. 5. The diffractive optical element 30A formed on the flat panel 35 has a positive refractive power in spite of the flat surface. This results from that the diffractive optical element 30A is designed to provide with the 1st order diffractive lights and to eliminate the high order diffractive lights. To this end, the refractive lens employing the diffractive optical element can obtain a desirable refractive power by only the flat surface without the curvature for providing a negative or a positive refractive power to the refractive lens. Such a characteristic of the diffractive

optical element 30A forces the thickness and size of the lens system to be small.

Table 1 represents first data regarding the radius  $r$  of each lens surface, distances  $d$  between the lenses, the refractive power  $N_d$  and Abbe's number  $\nu_d$  of each lens. Tables 2 and 3 represent first coefficient values defining a shape of aspherics and diffractive optical element 30A, respectively.

10

Table 1

Lens	Surface	$r$	$d$	$N_d$	$\nu_d$
First Lens	S1	65.841	6.930	1.4915	57.8
	S2	200.000	30.437		
Second Lens	S3	98.102	20.000	1.5943	62.0
	S4	-92.729	35.026		
Third Lens	S5	-54.000	3.500	1.5090	51.9
	S6	-50.000	9.000	1.4395	62.8
CRT Panel	S7	Flat	14.100	1.5632	55.2
	S8	-350.000			

Table 2

	K	A	B	C	D	E
S1	-0.1597	-0.5007E	-0.4273E	0.4141E	-0.3524E	0.6939E
		-09	-07	-12	-15	-19
S2	-3.2887	-0.1541E	0.2379E	-0.3023E	0.1776E	-1.3834E
		-04	-07	-10	-13	-17

15 Table 3

	HZ1	HZ2	HWL	C1	C2	C3
S2	-0.1000E	-0.1100E	544.00	4.1763	9.9045E	7.7178E
	3	3		-05	-08	-11

Table 4 represents first data regarding the radius  $r$  of each lens surface, distances  $d$  between the lenses, the refractive power  $Nd$  and Abbe's number  $\nu_d$  of each lens. Tables 5 and 6 represent first coefficient values defining a shape of aspherics and diffractive optical element 30A, respectively.

Table 4

Lens	Surface	$r$	$d$	$Nd$	$\nu_d$
First Lens	S1	65.841	6.930	1.4915	57.8
	S2	200.000	30.437		
Second Lens	S3	98.102	20.000	1.5943	62.0
	S4	-92.729	35.026		
Third Lens	S5	-54.000	3.500	1.5090	51.9
	S6	-50.000	9.000	1.4395	62.8
CRT Panel	S7	Flat	14.100	1.5632	55.2
	S8	-350.000			

10 Table 5

	K	A	B	C	D	E
S1	-0.0656	-0.5107E	-0.2450E	0.2173E	-0.1598E	0.2394E
		-06	-09	-12	-15	-19
S2	-0.9022	-0.1121E	0.2084E	-0.3039E	0.2062E	-0.5216E
		-04	-07	-10	-13	-17

Table 6

	HZ1	HZ2	HWL	C1	C2	C3
S2	-0.1000E	-0.1100E	544.00	-1767E	6.0183E	7.7765E
	-13	-03		-05	-08	-17

The data represented in tables 1 to 6 have meanings as follows. Firstly, the aspheric coefficients defining a shape of surfaces S1 and S2 of aspherics 30 are determined

by the following equation:

$$X(r)=[cr^2/\{1+(1-(1+K)c^2r^2)\}^{1/2}]+Ar^4+Br^6+Cr^8+Dr^{10}+Er^{12}\dots \quad (2)$$

5   Wherein,  $X(r)$  is a sag value of with reference to a  
aspheric surface at a height  $r$  from an optical axis,  $c$   
does a curvature of the lens surface at the height  $r$  from  
an optical axis,  $K$  does a conic constant, and  $A$  to  $E$  do  
aspheric coefficients.

10

“HZ1” and “HZ2” in tables 3 and 6 are distances from the  
diffractive optical element 30A to an object point source  
and to a reference point source. Since the diffractive  
optical element 30A applied to the projection lens system  
15 of the present invention has a spindle symmetrical  
characteristic, the object and reference point sources are  
positioned at an optical axis. “HWL” is a reference wave  
length of light beam which is used to the fabrication of  
the diffractive optical element 30A. The present  
20 invention uses a light beam from a green cathode ray tube,  
which has the center wave length of 544nm, as the  
reference wave length. A aspheric phase amount of the  
diffractive optical element, which is generated by an  
interference of lights from an object source and a  
25 reference source, is determined by the following equation:

$$\varphi(y)=c_1y^2+c_2y^4+c_3y^6+\dots \quad (3)$$

wherein  $\varphi(r)$  represents a phase at a position  
30 corresponding to the height of  $y$  from the optical axis,  
and  $c_1$  to  $c_3$  to  $E$  represent coefficients of the phase item

having a aspheric effect. F/# of the projection lens system, which the first data and coefficient values represented in tables 1 to 3 are applied to, is 1.047. Then, a focal length is 74.0 mm. Also, F/# of the  
5 projection lens system, which the second data and coefficient values represented in tables 4 to 6 are applied to, is 1.054. Then, a focal length is 78.2449 mm. In the projection lens system of Fig. 3, which the data described above is adaptable to, facilitates a combination  
10 and adjustment thereof because all of the aspherics 30 and the diffractive optical element 30A has the spindle symmetrical characteristic against the optical axis.

Referring to Fig. 6, there is shown a projection lens  
15 system according to an embodiment of the present invention. The projection lens system includes a first lens 20 having a positive refractive power at the center thereof and having a negative refractive power at the peripheral thereof, a second lens 22 having a positive refractive  
20 power, a third lens 24 having a positive refractive power and provided with a diffractive optical element (DOE) at one side thereof, and a fourth lens 36 having a negative refractive power. The first lens 20 consists of a aspheric lens made from a plastic material to correct a spherical  
25 aberration. Also, the first lens 20 has a positive refractive power at the center thereof and a negative refractive power at the peripheral thereof to correct a comma aberration and an astigmatism. The second lens 22 is made from a glass material and is responsible for the  
30 majority of entire refractive power in the projection lens system. The third and fourth lenses 24 and 26 consist of a

plastic lens to correct an astigmatism and field curvature.  
The third lens 34 has a structure in which a diffractive  
optical element 24A is formed at one side of the lens with  
a positive refractive power so as to correct a color  
5 aberration.

In detail, conventional refractive lens 28 enables a focal  
length of blue light beam to be shorter than that of red  
light beam, among the light beams having color signals as  
10 shown in Fig. 7A. Meanwhile, the diffractive optical  
element 24A forces a focusing distance of red light beam  
to be shorter than that of blue light beam, among the  
light beams having color signals as shown in Fig. 7B. In  
this case, the Abbe's number  $\nu_d$  representing the  
15 dispersion of refractive lens 28 is determined by  
following equation:

$$\nu_d = (N_d - 1) / (N_F - N_C) \text{ ----- (4)}$$

20 Wherein, "N" is a refractive index at a spectrum wave  
length of each added letter. Also, when a wave length of  
spectrum ray for each added letter is " $\lambda$ ", Abbe's number  
of diffractive optical element 24A is determined by  
following equation:

25

$$\nu_d = \lambda_d / (\lambda_F - \lambda_C) = -3.45 \text{ ----- (5)}$$

As seen in equations 4 and 5, Abbe's number  $\nu_d$  of the  
refractive lens 28 has the positive value of about 25 to  
65, while Abbe's number of the diffractive optical element  
30 30A the negative value of -3.45. In other words, the  
refractive lens 28 and the diffractive optical element 30A



have the chromatic dispersion characteristics opposite to each other. To this end, the third lens 24 including a plastic lens (i.e., a refractive lens) having a positive refractive power and the diffractive optical element 24A having the diffractive characteristic and being formed on the surface of the plastic lens corrects by using the opposite chromatic dispersion characteristics. The projection lens system shown in Fig. 6 has a good chromatic aberration correction characteristic by the third lens 24, as shown in Fig. 9A and 9B. In Figs. 9A and 9B, "PR", "PG" and "PB" are light characteristic by the present invention, and "OR", "OG" and "OB" are light characteristic by the prior art. As seen in a chromatic aberration graph varying along with the height  $y$  from the optical axis on the Y axis shown in Fig. 9A and a chromatic aberration graph in accordance with the height  $y$  from the optical axis on the X axis shown in Fig. 9B, the third lens 24 forces the chromatic aberrations for the red, green and blue to decrease, thereby enhancing the chromatic aberration correction characteristic.

Table 7 represents data regarding the radius of curvature  $r$  of each lens surface, distances  $d$  between the lenses, the refractive power  $N_d$  and abbe's number  $\nu_d$  of each lens, which is adaptable to the projection lens system shown in Fig. 6. Table 8 represents coefficient values defining a shape of aspherics and diffractive optical element 30A as shown in Fig. 6.

Table 7

LENS	S	r	d	$N_d$	$\nu_d$
1ST LENS	S11	72.4300	8.6400	1.4935	57.8
	S12	80.9700	28.8000		
2ND LENS	S13	73.6700	25.0000	1.5916	62.0
	S14	-215.3300	20.0200		
3RD LENS	S15	-359.8100	8.0000	1.4938	57.8
	S16	-94.5	29.55		
4TH LENS	S17	-49.5100	3.5000	1.4938	57.8
	S18	-47.0000	12.9400	1.4392	62.8
CRT	S19	Infinity	14.1000	1.5551	55.2
PANEL	S20	-350.0000	0.000		

TABLE 8

LENS SURFACE	K	A	B	C	D	E
S11	-1.3480E+00	1.6080E-07	-8.4679E-10	1.5770E-13	1.3850E-17	-2.9262E-21
S12	5.0000E-02	5.3046E-07	-1.8278E-09	1.4642E-12	-7.9311E-16	2.5535E-19
S15	8.3325E+01	-1.5942E-06	-6.9339E-10	3.800E-13	-6.0061E-16	2.0398E-19
S16	-14.987	9.66E-07	5.32E-10	-3.77E-13	-3.26E-17	0
S17	0.432533	-3.12E-06	1.09E-08	-1.90E-11	1.80E-14	-8.65E-18
S16(DOE)	0	-4.45E-04	0	0	0	0

In Table 8, the coefficient values determining the shape of the first lens 20 formed in a aspheric surface and the shapes of the third and fourth lenses 24 and 26 are defined by the equation 2 as described above. Also, a aspheric phase amount of the diffractive optical element 24A generated by an interference between a object source and a reference source in the diffractive optical element 24A is determined by the phase amount equation 3 described above. The phase amount of the diffractive optical element 24A applicable to the present invention has a characteristic reduced in proportion to the height r from

the optical axis as shown in Fig. 8. The phase amount characteristic graph of the diffractive optical element 24A shown in Fig. 8 is related to a zone number of the diffractive optical element 24A, and which shows a requirement for an optimum design of the phase amount for which the diffractive optical element 24A for the purpose of improving an optical performance in consideration of a diffraction efficiency and a working performance of lens. To this end, the diffractive optical element 24A is formed in such a manner that a plurality of recesses with a concentric circles shape has a rotational symmetry, and a pitch of the recess becomes smaller as it goes from the center into the peripheral. A chromatic aberration, a spherical aberration and a distortion aberration, etc. can be corrected by combining such a diffractive optical element 24A with the aspheric plastic lens. Accordingly, it is not required to additionally use lenses of an expensive material having a negative refractive power and enlarging a dispersion of beam like the prior art so as to correct a color aberration, so that the present invention is capable of reducing a manufacturing cost and is advantageous in making a small-size projection lens system. Also, the projection lens system can be made into a thinner type as a focus length of the projection lens system becomes shorter. To this end, it is desirable that the second lens 22 responsible for the majority of the entire refractive power is designed to have a large refractive power. When the refractive power is large, however, a spherical aberration is generated to thereby have a limit in enlarging a refractive power of the second lens 22. Accordingly, a refractive power of the second

lens 22 is distributed to the diffractive optical element 24A to raise a refractive power of the projection lens system and thus reduce the entire focal length, so that a thin-type device can be made.

5

Furthermore, a brightness of the projection lens system can be improved with the aid of the diffractive optical element 24A. In other words, a refractive power is distributed to the diffractive optical element 24A to  
10 reduce a focal length of the projection lens system, so that a brightness of the projection lens system can be improved. This is because a brightness of the projection lens system is in inverse proportion to a square of F/# having a relationship proportional to a focus length f as  
15 indicated in the following equation:

$$\text{Brightness} \propto 1 / (F/\#)^2, F/\# = f/D \text{ ----- (3)}$$

wherein D represents a diameter of the lens. Since F/#  
20 becomes smaller as the entire focal length of the projection lens system is smaller as seen from said equation (6), a brightness of the projection lens system being in inverse proportional to a square of F/# becomes better so that a high brightness can be realized.

25

As described above, the present projection lens system employs the diffractive optical element 24A to correct a color aberration and a spherical aberration, etc., thereby improving an optical performance without increasing the  
30 number of lenses. Also, the present projection lens system employs the diffractive optical element 24A to undertake

partial responsibility for a refractive power and thus reduce the entire focal length, so that a thin-type device and a high brightness can be obtained. In addition, the present projection lens system takes advantage of the first lens 20 having a aspheric surface and having a positive refractive power at the center thereof and a negative refractive power at the peripheral thereof to compensate for optical aberrations (i.e., a spherical aberration, a waveform aberration and an astigmatism), thereby reducing the number of lenses.

Fig. 10 shows a projection lens system according to an embodiment of the present invention. The projection lens system of Fig. 10 includes a first lens 110 having a positive refractive power, a second lens 120 having a weak refractive power, a third lens 130 having a positive refractive power, a fourth lens 140 having a diffractive optical element (DOE) 140a formed on one side thereof, and a fifth lens 150 having a negative refractive power. The first and second lenses 110 and 120 consist of an aspheric lens made from a plastic material to correct a spherical aberration. The third lens 130 is made from a glass material and is responsible for the majority of entire refractive power in the projection lens system. The fourth and fifth lenses 140 and 150 consist of a plastic lens to correct an astigmatism and field curvature. The fourth lens 140 has a structure in which a diffractive optical element 140a is formed at one side of the lens with a positive refractive power so as to correct a chromatic aberration. The fourth lens 140 has a good chromatic aberration correction characteristic as the refractive

lens and the diffractive optical element 140A have the chromatic dispersion characteristics opposite to each other. The projection lens system has the good chromatic aberration correction characteristic by the fourth lens 140, as shown in Figs. 9A and 9B.

The aspheric phase amount varying along with the height  $y$  from the optical axis and defining a surface shape of the diffractive optical element 140A is determined by the phase amount equation 3 described above. The phase amount of the diffractive optical element 140A applicable to the present invention has a characteristic reduced in proportion to the height  $y$  from the optical axis as shown in Fig. 8. The phase amount characteristic graph of the diffractive optical element 140A shown in Fig. 8 is related to a zone number of the diffractive optical element 24A, and which shows a requirement for an optimum design of the phase amount for which the diffractive optical element 140A for the purpose of improving an optical performance in consideration of a diffraction efficiency and a working performance of lens. To this end, the diffractive optical element 140A is formed in such a manner that a plurality of recesses with a concentric circles shape has a rotational symmetry, and a pitch of the recess becomes smaller as it goes from the center into the peripheral. A chromatic aberration, a spherical aberration and a distortion aberration, etc. can be corrected by combining such a diffractive optical element 24A with the plastic aspheric lens. Accordingly, it is not required to additionally use lenses of an expensive material having a negative refractive power and enlarging

a dispersion of beam like the prior art so as to correct a color aberration, so that the present invention is capable of reducing a manufacturing cost and is advantageous in making a small-size projection lens system. Also, the  
5 projection lens system can be made into a thinner type as a focal length of the projection lens system becomes shorter. To this end, it is desirable that the third lens 130 responsible for the majority of the entire refractive power is designed to have a large refractive power. When  
10 the refractive power is large, however, a spherical aberration is generated to thereby have a limit in enlarging a refractive power of the third lens 130. Accordingly, a refractive power of the third lens 130 is distributed to the diffractive optical element 140A to  
15 raise a refractive power of the projection lens system and thus reduce the entire focus length, so that a thin-type device can be made. Also, a refractive power is distributed to the diffractive optical element 24A to reduce a focus length of the projection lens system, so  
20 that a brightness of the projection lens system can be improved. This is because a brightness of the projection lens system is in inverse proportion to a square of  $F/\#$  having a relationship proportional to a focal length  $f$ , as the equation (6) described above.

25

Table 9 represents first data regarding the radius  $r$  of each lens surface, distances  $d$  between the lenses, the refractive power  $N$ , and abbe's number  $\nu_d$  of each lens, which is adaptable to the projection lens system shown in  
30 Fig. 10. Table 10 represents first coefficient values defining a shape of aspherics 110, 120, 140 and 150 and a

surface shape of diffractive optical element 140A as shown in Fig. 10. In table 10, the first coefficient values defining a shape of the aspheric surface in the first, second, fourth and fifth lenses 110, 120, 140 and 150 are determined by the equation (2) as described above.

Table 9

LENS	LENS SURFACE	r	d	$N_d$	$\nu_d$
1ST LENS	S21	111.000	8.600	1.494000	57.8
	S22	299.109	14.400		
2ND LENS	S23	-140.000	8.200	1.494000	57.8
	S24	-155.321	3.600		
3RD LENS	S25	74.500	25.000	1.592000	62.0
	S26	-220.500	9.863		
4TH LENS	S27	-415.000	7.000	1.494000	57.8
	S28	-115.876	33.000		
5TH LENS	S29	-50.782	3.500	1.494000	57.8
	S30	-45.000	9.000	1.430000	62.8
CRT PANEL	S31	Infinity	14.1	1.563000	55.2
	S32	-350.0	0		

TABLE 10

LENS SURFACE	K	A	B	C	D	E
S21	-17.15900	1.162E-07	-1.313E-09	-4.585E-13	4.961E-16	-1.025E-19
S22	0.000000	6.029E-07	7.796E-10	-5.599E-13	4.406E-16	-8.283E-20
S23	-10.000000	1.717E-06	-2.944E-10	-1.286E-12	4.009E-16	0.000E+00
S24	-1.727000	1.612E-06	-3.750E-10	-1.096E-12	5.164E-16	-5.476E-20
S27	101.81000	5.163E-07	3.253E-10	-1.839E-14	4.097E-16	0.000E+00
S27(DOE)	0.000000	-2.546E-04	0.000000	0.000000	0.000000	0.000E+00
S28	-41.46900	2.136E-06	3.747E-09	-3.142E-12	1.889E-15	-2.799E-19
S29	-0.77700	5.140E-06	2.687E-09	-3.730E-12	2.504E-15	-7.896E-19
S30	0.000000	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00



On the basis of the data represented in tables 9 and 10, the shape of each lens included in the projection lens system according to embodiment of the present invention is decided and designed. Also, there will be described a treating method of the aspheric lens. Actually, the front face of the first lens 110 having the radius of 111.000 is formed by which A to E positions on the spherical lens having a constant radius are treated to correspond to the coefficients in table 10. The first, second, fourth and fifth lenses 110, 120, 140 and 150 are formed by the same treating process.

Table 11 represents second data regarding the radius of  $r$  of each lens surface, distances  $d$  between the lenses, the refractive power  $N_d$  and abbe's number  $\nu_d$  of each lens, which is adaptable to the projection lens system shown in Fig. 10. Tables 12 represents second coefficient values defining a shape of aspherics 110, 120, 140 and 150 and a surface shape of diffractive optical element 140A as shown in Fig. 10.

Table 11

LENS	LENS SURFACE	$r$	$D$	$N_d$	$\nu_d$
1ST LENS	S21	101.635	8.600	1.494000	57.8
	S22	190.658	15.400		
2ND LENS	S23	280.338	8.200	1.494000	57.8
	S24	443.295	3.600		
3RD LENS	S25	78.280	25.000	1.592000	62.0
	S26	-194.639	7.000		
4TH LENS	S27	-712.755	7.000	1.494000	57.8

	S28	-137.901	33.562		
5TH LENS	S29	-48.084	3.500	1.494000	57.8
	S30	-45.000	9.000	1.430000	62.8
CRT	S31	Infinity	14.1	1.563000	55.2
PANEL	S32	-350.0	0		

TABLE 12

LENS SURFACE	K	A	B	C	D	E
S21	-10.000000	2.963E-07	-1.925E-09	1.485E-14	3.251E-16	-6.104E-20
S22	0.0000000	5.029E-7	-2.422E-09	6.559E-13	4.874E-17	-1.649E-20
S23	-10.0000000	1.717E-06	-2.944E-10	-1.288E-12	4.009E-16	0.000E+00
S24	0.000000	9.716E-07	1.142E-10	-1.612E-12	6.936E-16	-7.465E-20
S27	24.65800	2.926E-07	-3.045E-11	5.413E-14	2.714E-16	0.000E+00
S27(DOE)	0.000000	-2.000E-04	0.000000	0.000000	0.000000	0.000000
S28	-45.04800	1.117E-06	1.429E-09	-6.531E-13	4.908E-16	-1.380E-20
S29	0.000000	5.236E-06	3.978E-09	-4.788E-12	3.183E-15	-9.871E-19
S30	0.000000	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00

On the basis of the data represented in tables 11 and 12, the shape of each lens included in the projection lens system according to embodiment of the present invention is decided and designed. Also, there will be described a treating method of the aspheric. Actually, the front face of the first lens 110 having the radius of 101.635 is formed by which A to E positions on the spherical lens having a constant radius are treated to correspond to the coefficients in table 12. The first, second, fourth and fifth lenses 110, 120, 140 and 150 are formed by the same treating process.

Table 13 represents third data regarding the radius of curvature  $r$  of each lens surface, distances  $d$  between the lenses, the refractive power  $N_d$  and abbe's number  $\nu_d$  of

each lens, which is adaptable to the projection lens system shown in Fig. 10. Tables 14 represents third coefficient values defining a shape of aspherics 110, 120, 140 and 150 and a surface shape of diffractive optical element 140A as shown in Fig. 10.

Table 13

LENS	LENS SURFACE	r	d	Nd	$\nu_d$
1ST LENS	S21	82.962	8.600	1.494000	57.8
	S22	121.163	15.381		
2ND LENS	S23	280.338	8.200	1.494000	57.8
	S24	817.986	3.660		
3RD LENS	S25	71.753	25.000	1.592000	62.0
	S26	-265.639	7.020		
4TH LENS	S27	-356.111	7.000	1.494000	57.8
	S28	-127.715	33.000		
5TH LENS	S29	-52.782	3.500	1.494000	57.8
	S30	-45.000	9.000	1.430000	62.8
CRT PANEL	S31	Infinity	14.1	1.563000	55.2
	S32	-350.0	0		

TABLE 14

LENS SURFACE	K	A	B	C	D	E
S21	-10.525000	1.446E-06	-2.585E-09	-2.577E-13	6.292E-16	-1.224E-19
S22	0.000000	5.697E-07	-2.303E-09	-1.592E-13	5.906E-16	-1.153E-19
S23	-10.000000	1.717E-06	-3.481E-10	-1.286E-12	4.009E-16	0.000E+00
S24	0.000000	7.759E-07	-3.480E-10	-9.128E-13	2.923E-16	0.000E+00
S27	-85.58500	3.547E-07	-1.366E-09	2.086E-12	4.252E-16	0.000E+00
S27(DOE)	0.000000	-2.546E-04	0.000000	0.000000	0.000000	0.000000
S28	-45.04800	1.599E-06	1.098E-09	4.231E-13	1.535E-16	0.000E+00
S29	0.000000	6.856E-06	8.342E-09	-1.223E-11	8.706E-15	-2.530E-18
S30	0.000000	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00

On the basis of the data represented in tables 13 and 14, the shape of each lens included in the projection lens system according to embodiment of the present invention is decided and designed. Also, there will be described a treating method of the aspheric lens. Actually, the front face of the first lens 110 having the radius of 82.962 is formed by which A to E positions on the spherical lens having a constant radius curvature are treated to correspond to the coefficients in table 14. The first, second, fourth and fifth lenses 110, 120, 140 and 150 are formed by the same treating process.

As described above, the projection lens system according to the present invention employs a diffractive optical element to correct a color aberration and a spherical aberration, etc., so that it is capable of implementing a high resolution without adding the lenses of flint series as well as reducing the manufacturing cost. Also, the projection lens system according to the present invention employs a diffractive optical element to reduce a focal length, so that a thin-type device and a high brightness can be obtained.

Although the present invention has been explained by the embodiments shown in the drawings described above, it should be understood to the ordinary skilled person in the art that the invention is not limited to the embodiments, but rather that various changes or modifications thereof are possible without departing from the spirit of the invention. Accordingly, the scope of the invention shall

be determined only by the appended claims and their equivalents.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222  
2223  
2224  
2225  
2226  
2227  
2228  
2229  
2230  
2231  
2232  
2233  
2234  
2235  
2236  
2237  
2238  
2239  
2240  
2241  
2242  
2

**What is claimed is:**

1. A projection lens system, comprising:  
a plurality of lenses; and  
5 at least one diffractive optical element formed on at least one among the surfaces of the lenses.
2. The projection lens system according to claim 1, wherein one surface of the diffractive optical element  
10 includes a groove having a rotation symmetry on a spherical surface.
3. The projection lens system according to claim 1, wherein one surface of the diffractive optical element  
15 includes a groove having a rotation symmetry on a plane surface.
4. The projection lens system according to claim 1, wherein the diffractive optical element includes a  
20 positive refractive power.
5. The projection lens system according to claim 1, wherein the diffractive optical element includes a  
negative refractive power.
- 25 6. The projection lens system according to claim 1, wherein one surface of the diffractive optical element includes a pitch of grooves having a rotation symmetry on a spherical surface.
- 30 7. The projection lens system according to claim 1,

wherein one surface of the diffractive optical element includes a pitch of grooves having a rotation symmetry on a plane surface.

- 5 8. A projection lens system, comprising:  
a plurality of refractive lenses; and  
at least one diffractive optical element formed on at least one among the faces of the refractive lenses to correct chromatic aberrations at on axis and off axis.

10

9. The projection lens system according to claim 8, wherein one surface of the diffractive optical element includes a groove having a rotation symmetry on a spherical surface.

15

10. The projection lens system according to claim 8, wherein one surface of the diffractive optical element includes a groove having a rotation symmetry on a plane surface.

20

11. The projection lens system according to claim 8, wherein the diffractive optical element has a positive refractive power.

- 25 12. The projection lens system according to claim 8, wherein the diffractive optical element has a negative refractive power.

13. The projection lens system according to claim 8,  
30 wherein one surface of the diffractive optical element includes a pitch of grooves having a rotation symmetry on

a spherical surface.

14. The projection lens system according to claim 8,  
wherein one surface of the diffractive optical element  
5 includes a pitch of grooves having a rotation symmetry on  
a plane surface.

15. A projection lens system, comprising:

a first lens for correcting an aberration generated  
10 by a variation of height from a light axis, the first lens  
having at least one surface formed with diffractive  
optical element thereon;

a second lens for refracting lights passed through  
the first lens; and

15 a third lens for correcting a field curvature and an  
astigmatism of the lights passed through the second lens.

16. The projection lens system according to claim 15,  
wherein the first lens has a side of aspheric surface and  
20 another side of diffractive optical surface.

17. The projection lens system according to claim 15,  
wherein one surface of the diffractive optical element  
includes a groove having a rotation symmetry on a  
25 spherical surface.

18. The projection lens system according to claim 15,  
wherein one surface of the diffractive optical element  
includes a groove having a rotation symmetry on a plane  
30 surface.



19. A projection lens system, comprising:

a first lens having a positive refractive power at the center thereof and a negative refractive power at the peripheral thereof;

5 a second lens having a relatively large positive refractive power;

a third lens having a positive refractive power;

a fourth lens having a negative refractive power; and

a diffractive optical element formed on at least one  
10 surface of said lenses.

20. The projection lens system according to claim 19, wherein said first, third and fourth lenses are designed to have a aspheric surface.

15

21. The projection lens system according to claim 19, wherein one surface of said first lens is designed to have a aspheric surface and the other surface of said first lens is designed into a surface of the diffractive optical  
20 element.

22. The projection lens system according to claim 19, wherein one surface of said third lens is designed to have an aspheric surface and the other surface of said first  
25 lens is designed into a surface of the diffractive optical element.

23. The projection lens system according to claim 19, wherein a plurality of recesses with a shape of concentric  
30 circles are provided at the diffractive optical element in such a manner to have a rotational symmetry.

24. The projection lens system according to claim 23,  
wherein pitches of said recesses are decreased in such a  
manner that a phase amount is reduced as it goes from the  
5 center of the diffractive optical element into the  
peripheral thereof.

25. The projection lens system according to claim 19,  
wherein at least one of said lenses is made from a plastic.  
10

26. A projection lens system, comprising:  
a first lens having a weak refractive power;  
a second lens having a weak refractive power;  
a third lens having a strong positive refractive  
15 power;  
a fourth lens for correcting an aberration generated  
by the third lens;  
a fifth lens having a negative refractive power; and  
at least one diffractive optical element formed on at  
20 least one among the surfaces of the lenses.

27. The projection lens system according to claim 26,  
wherein the first lens has an upper surface of convex  
shape, both side of the second lens are in convex surface,  
25 and the fourth lens includes at one surface having a  
diffractive optical element.

28. The projection lens system according to claim 26,  
wherein one surface of said first lens is designed to have  
30 an aspheric surface and the other surface of said first  
lens is designed into a surface of the diffractive optical

element.

29. The projection lens system according to claim 26,  
wherein one surface of said second lens is designed to  
5 have an aspheric surface and the other surface of said  
second lens is designed into a surface of the diffractive  
optical element.

30. The projection lens system according to claim 26,  
10 wherein one surface of said fourth lens is designed to  
have an aspheric surface and the other surface of said  
fourth lens is designed into a surface of the diffractive  
optical element.

31. The projection lens system according to claim 26,  
15 wherein the fourth lens has a weak refractive power.

32. The projection lens system according to claim 26,  
wherein the diffractive optical element has a positive  
20 refractive power.

33. The projection lens system according to claim 26,  
wherein the diffractive optical element has a negative  
refractive power.

25 34. The projection lens system according to claim 26,  
wherein one surface of the diffractive optical element  
includes a plurality of grooves having a rotation symmetry  
and a shape of concentric circles.

30 35. The projection lens system according to claim 26,

wherein the diffractive optical element includes a pitch of groove, which is gradually small to allowing a phase amount to decrease along with from the center to the outside of the diffractive optical element.

5

36. The projection lens system according to claim 26, wherein the second lens has a negative refractive power.

37. The projection lens system according to claim 26,  
10 wherein at least one among the lenses is made from a  
plastic material.

### Abstract

A projection lens system that has a compact configuration and is capable of correcting a color aberration. In the  
5 system, first and second lenses have a weak refractive power, respectively, and a third lens has a strong positive refractive power. A fourth lens corrects an aberration generated by the third lens, and a fifth lens has a negative refractive power. A diffractive optical  
10 element is formed on at least on among the surface of the first to fifth lenses. A color aberration and a spherical aberration is corrected with the diffractive optical element, so that a high resolution can be realized without increasing the number of lenses and the manufacturing cost  
15 can be reduced.

FIG. 1A  
RELATED ART

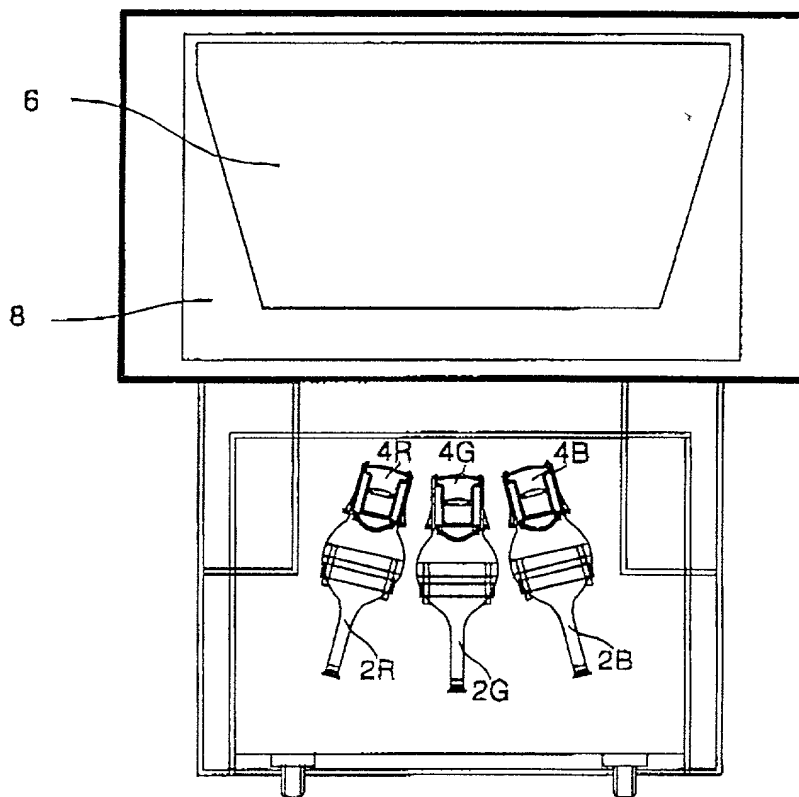




FIG.2  
RELATED ART

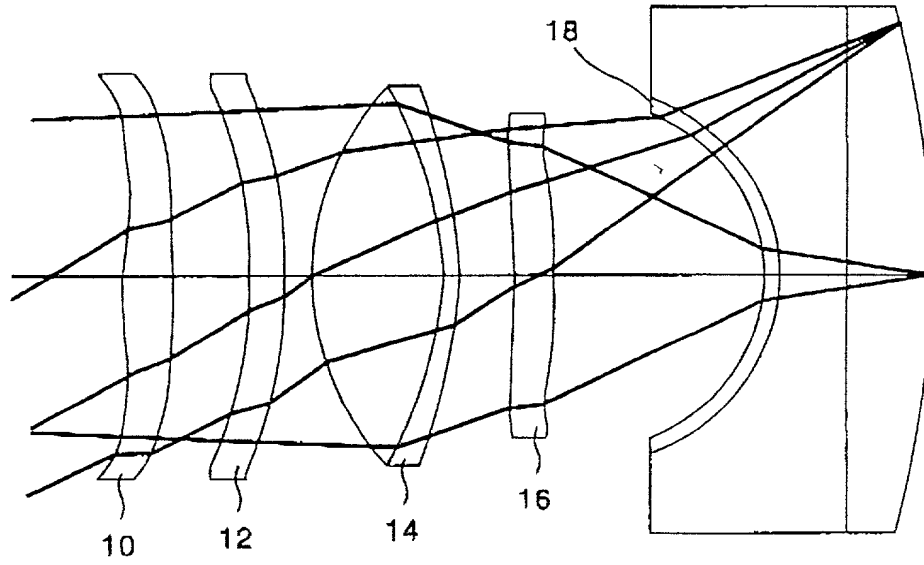






FIG. 4

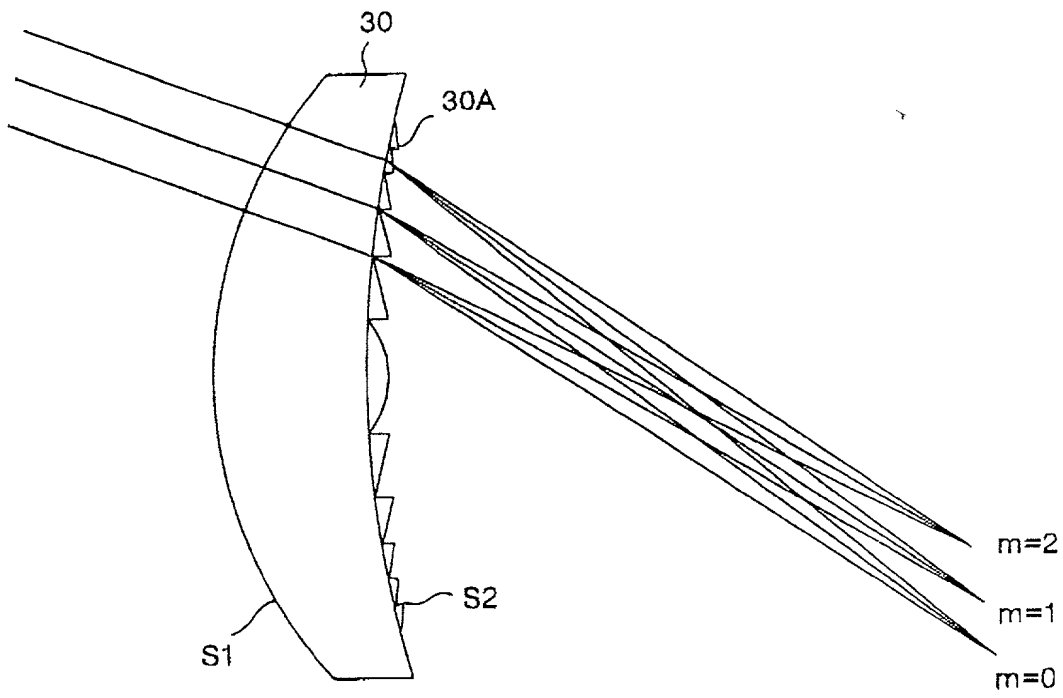


FIG.5

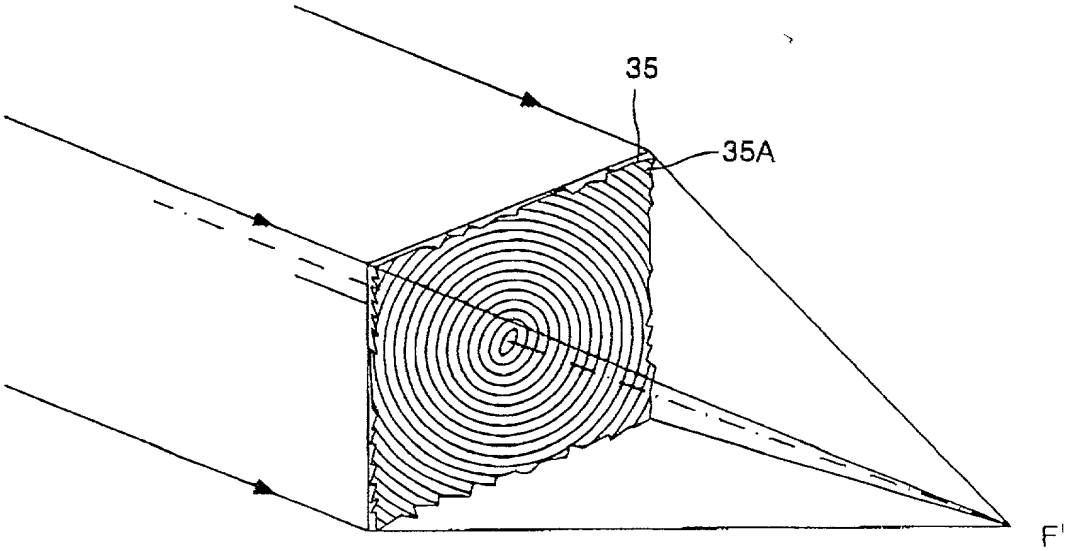


FIG.6

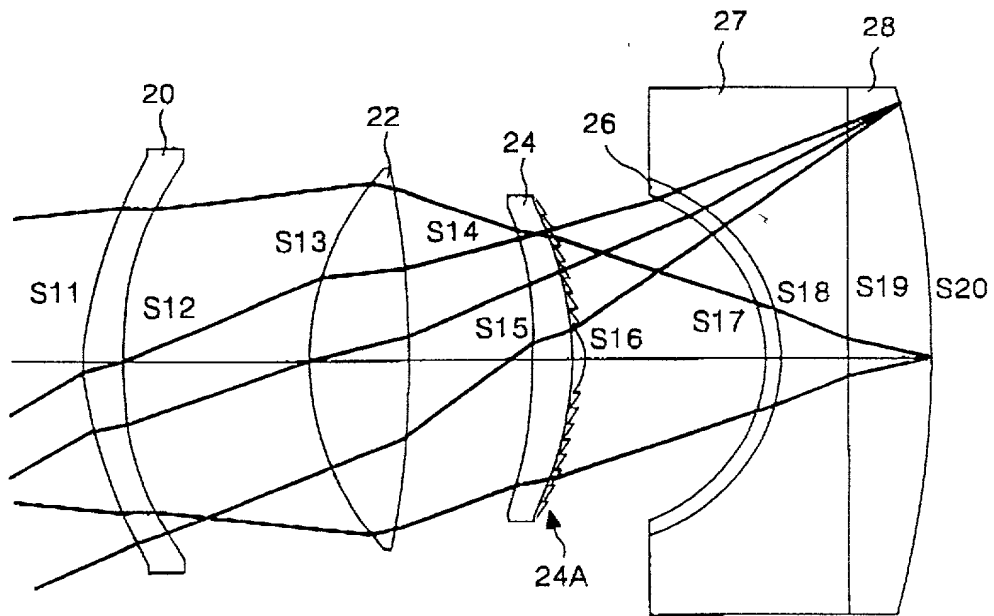


FIG. 7A

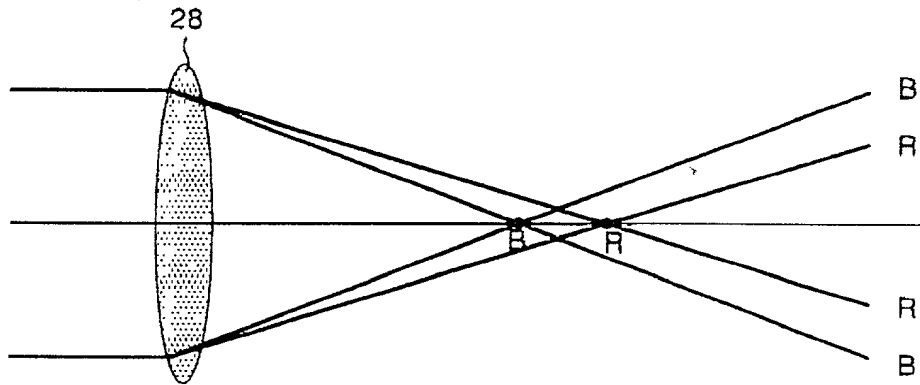


FIG. 7B

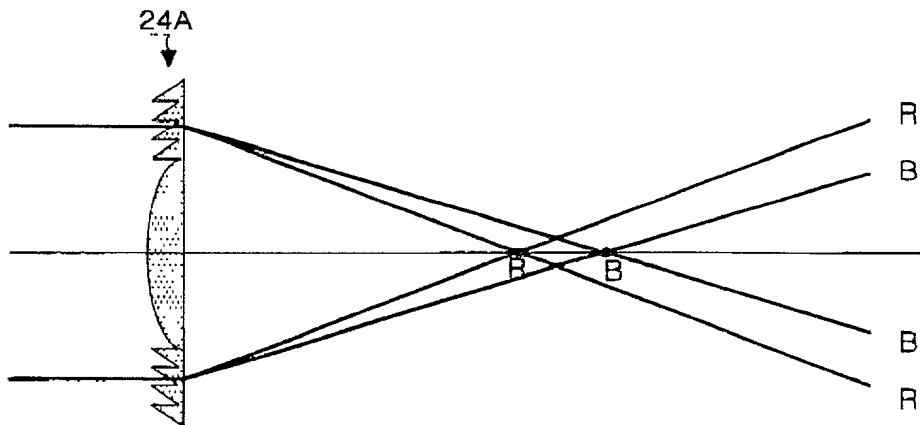


FIG.8

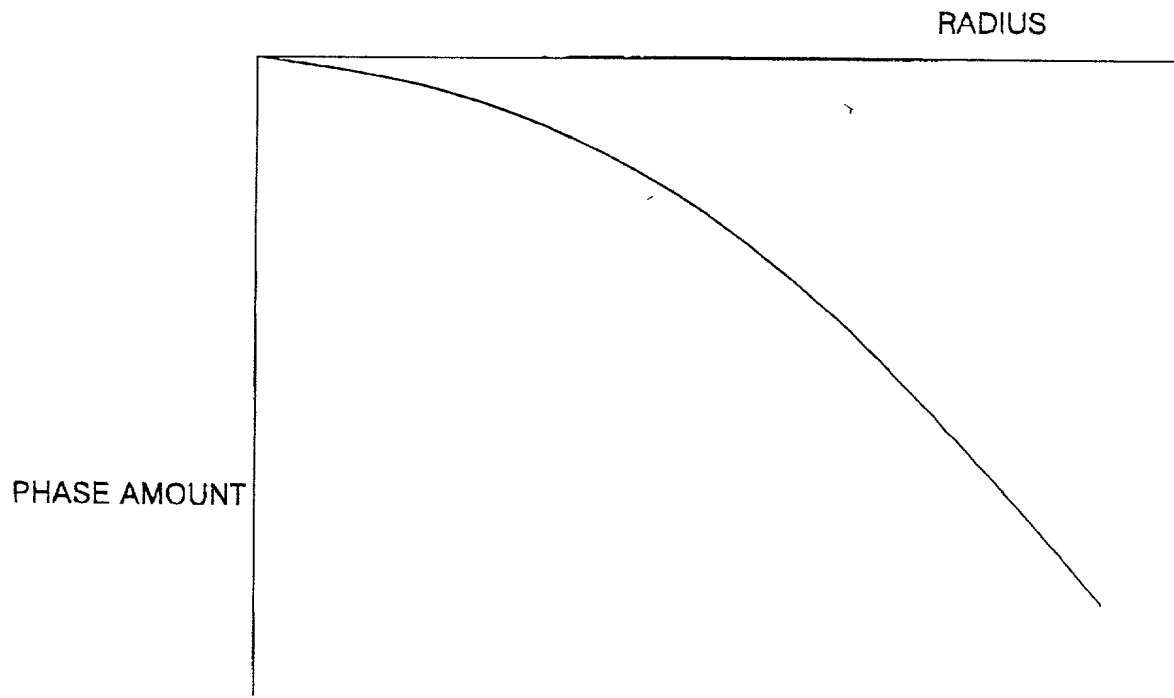


FIG.9A

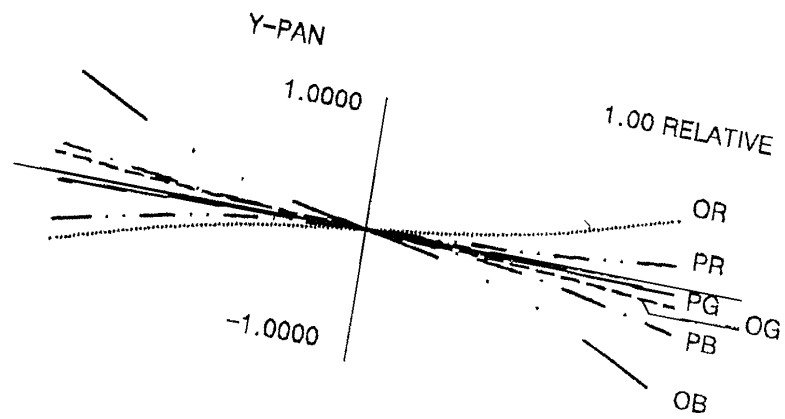


FIG.9B


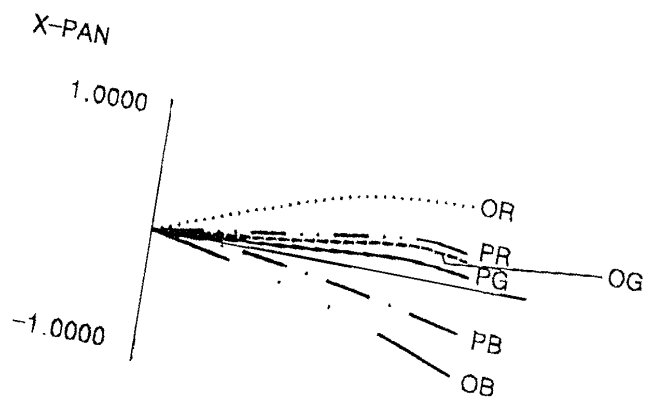


FIG.10



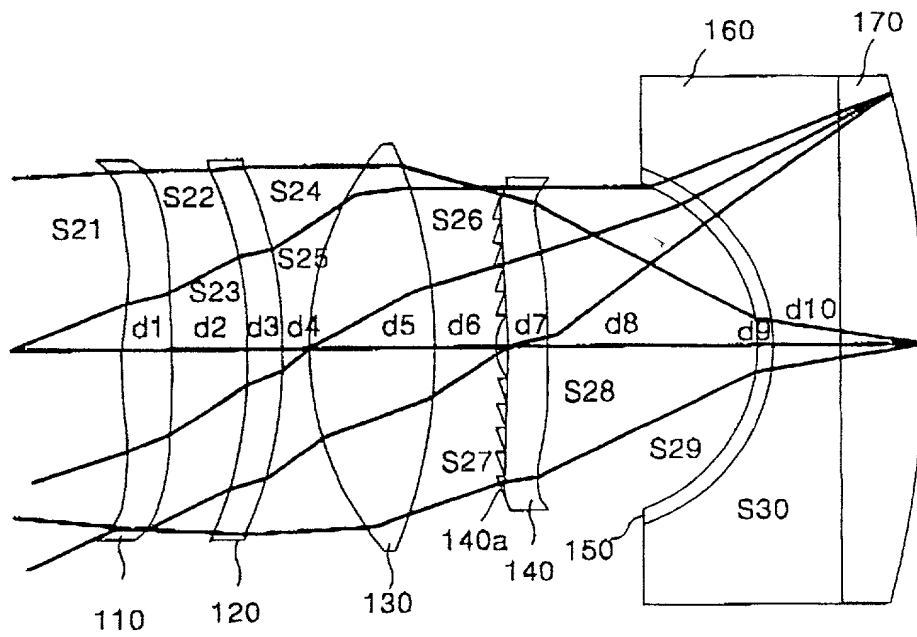

Docket No.: \_\_\_\_\_

## DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural name listed below) of the subject matter claimed and for which a patent is sought on the invention entitled "PROJECTION LENS SYST  
the specification of which

[X] is attached hereto[ ] was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and  
amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended  
any amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code  
Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365 (b) of any foreign application(s) for patent or inventor's certifi-  
or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below  
and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international  
application having a filing date before that of the application on which priority is claimed.

**Prior Foreign Application(s):**

<u>Number</u>	<u>Country</u>	<u>Foreign Filing Date</u> <u>Month/Day/Year</u>
P99-31570	Korea	07/31/99
P99-51042	Korea	11/17/99

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

<u>Application Number(s):</u>	<u>Filing Date (Month/Day/Year)</u>

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designat-  
the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in  
prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the  
to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of this  
application and the national or PCT international filing date of this application.

**Prior U. S. Application  
or PCT Parent Number**

Filing Date (Month/Day/Year)

Parent Patent Number (if applicable)


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief  
believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made  
punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false state-  
may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) and/or agent(s): Daniel Y. J. Kim, Registration No. 36,186 and Mark L. Fleshner, Registration No. 34,596; Carl R. Wesolowski, Registration No. 40,372, John C. Eisenhart, Registration No. 38,128, Rene A. Vazquez, Registration No. 38,647; Michael J. Cornelison, Registration No. 40,395; and Stuart L. Smith, Registration No. 42,159; and Carol L. Druzick, Registration No. 40,287, all of

FLESHNER & KIM  
P. O. Box 221200  
Chantilly, Virginia 20153-1200

with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to them.

Full name of sole or first inventor: Ho Young CHOI

Inventor's signature: 


Date: Feb. 28, 20

Residence: #803-401 Shinjeong Village, Pungdeokchoen-lee, Suji-cub, Yongin-shi  
Kyounggi-do, Korea

Citizenship: Republic of Korea

Post Office Address: Same as above

Full name of joint inventor(s): Hee Jong MOON

Inventor's signature: 


Date: Feb. 28, 20

Residence: #216 Jungmyoung Honyvill Apartment, 965, Dogok-dong Kangnam-ku,  
Seoul, Korea

Citizenship: Republic of Korea

Post Office Address: Same as above

Full name of joint inventor(s): Man Hyo PARK

Inventor's signature: 

Date: Feb. 28, 20

Residence: #240-402 Jukong Apartment, Wonmoon-dong, Kwacheon-shi, Kyounggi-do,  
Korea

Citizenship: Republic of Korea

Post Office Address: Same as above